


Before




Kawasaki Brute Force 2" Lift Kit Front Installation

- 1 Raise and support front end.
- 2 Remove tires and wheels.
- 3 Remove top shock bolt. Keep bolt to side for reinstallation.
- 4 **Figure A**
Pull shock outward out of way of top shock mount.

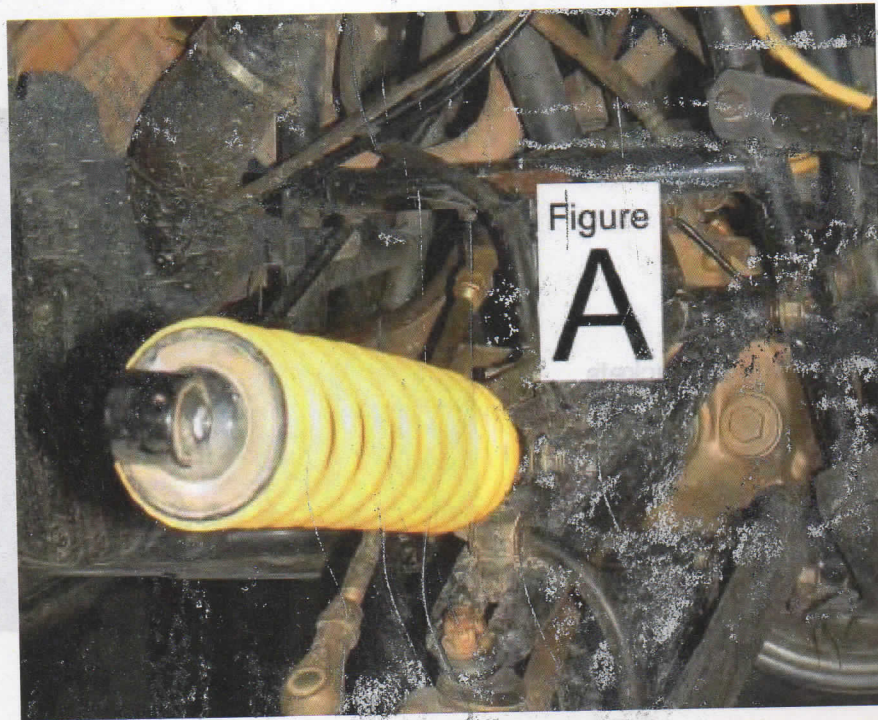


5

Figure B
Locate 5/16" x 1" bolt, flat,
locknut. Install in frame inside
of shock mount with washer
and bolt head inside frame as
shown. Tighten nut halfway.

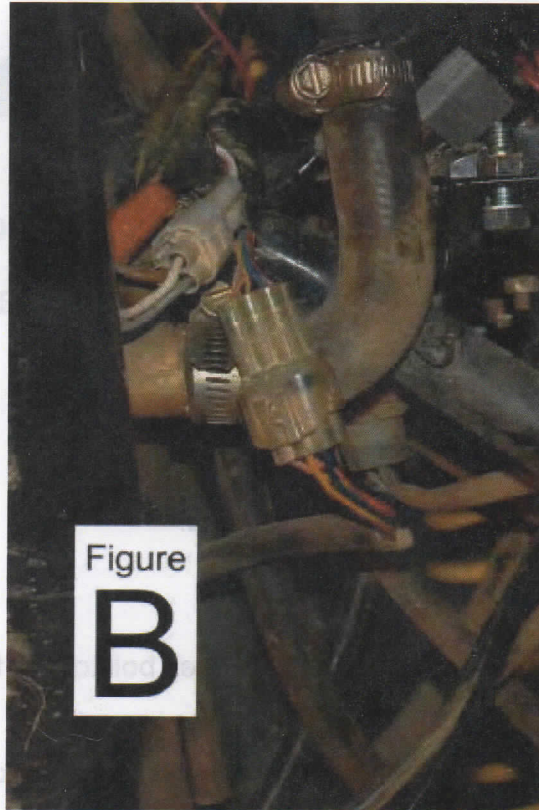


6

Figure C
Locate top shock brackets.

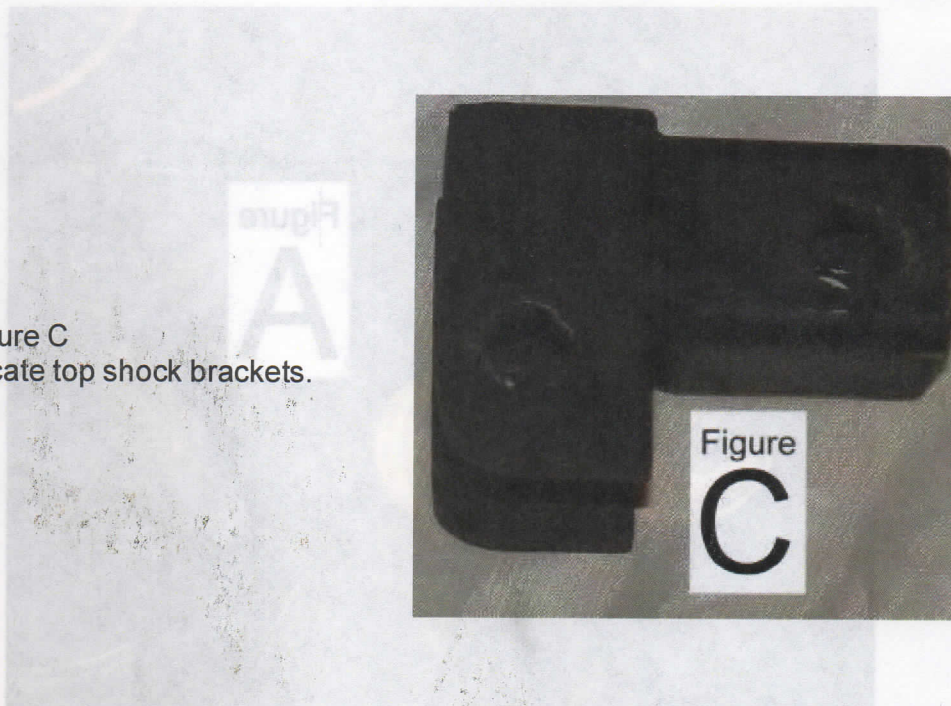

7

Figure D
Slide shock bracket into shock mount with notch over bolt and washer.

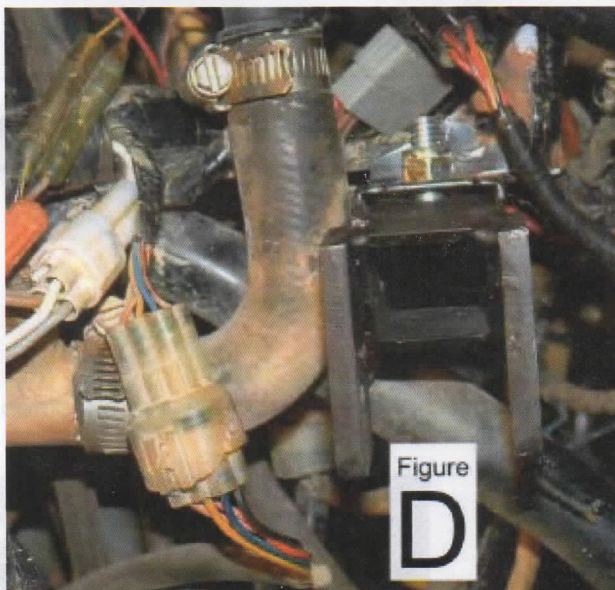

8

Start top shock bolt through one side of bracket to align holes with frame holes. Use 1/2" box end wrench to tighten 5/16" bolt.




9

Put shock bolt in and tighten with stock nut. It may be necessary to align with hammer

10

Figure E
Replace shock with 10mm x 60mm bolt and lock nut. Use pry bar to push shock down to install bolt.

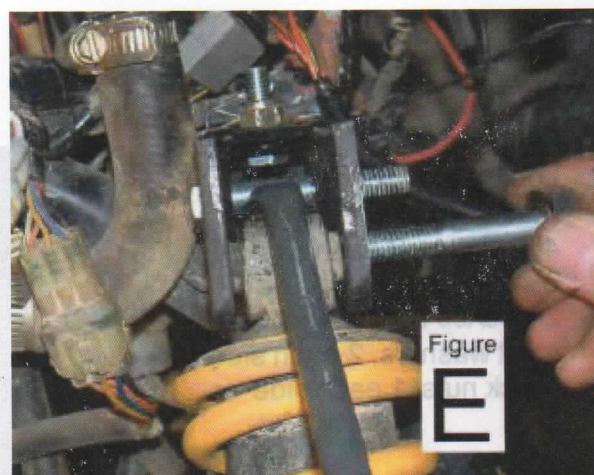


11 Insure that all hardware is tight.

Repeat steps 1-11 for other side. Replace front tires & wheels.


Rear Installation

- 1 Raise and support rear end.
- 2 Remove tires and wheels.
- 3 Figure F
Remove bottom shock bolts on both sides.

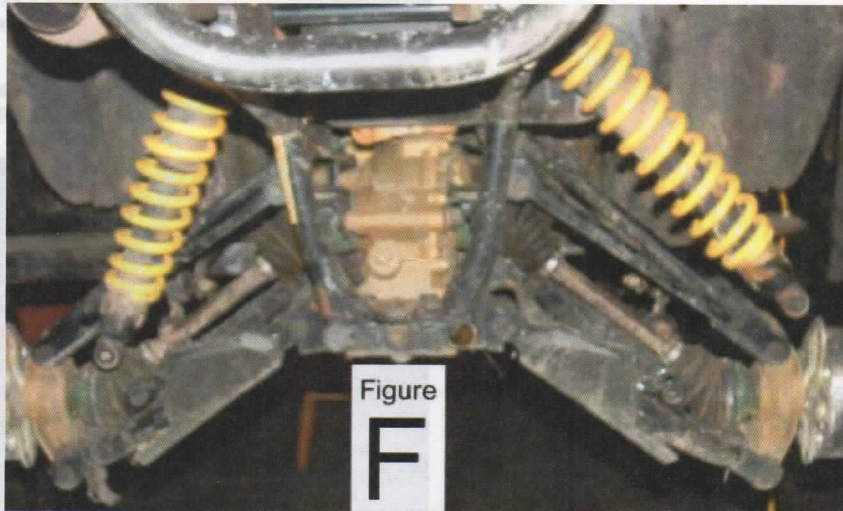


NOTE: When installing the Brackets in Fig.G, be sure you have the "Tabs" facing inward towards the center of the vehicle for proper placement. See Fig.G below & Fig. H.

- 4 Figure G
Locate rear shock brackets.
4 brackets, 2 each side
2 spacers, 1 each side
2 M10X60 bolts, 1 each side
4 flat washers, 2 each side
2 lock nuts, 1 each side

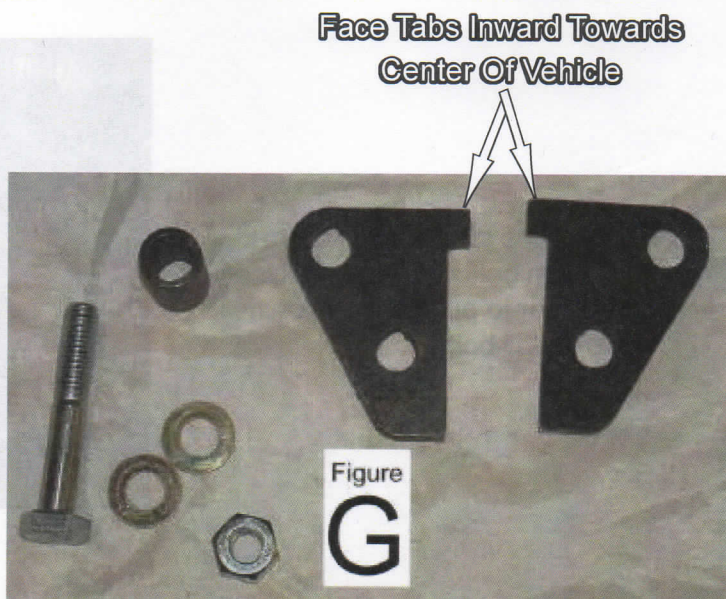

- 5
- Figure H
Install brackets with rear bracket on inside of stock shock bracket with spacer in center of bracket. Place front bracket outside of shock bracket. Use washer on each side. Do not tighten completely, yet.

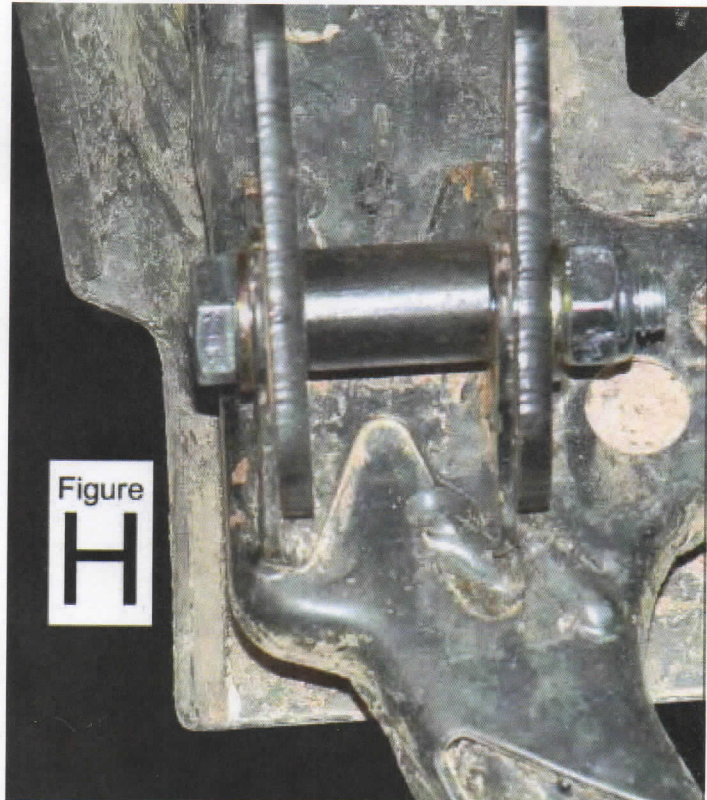

- 6
- Using pry bar, install 10mm x 60mm bolt, washers, locknut through shock brackets. Use washer on both sides. Tight all hardware.

Install two square tube spacers under sway bar mount with new bolts per picture.

7



Repeat for other side. Replace tires and wheels.